

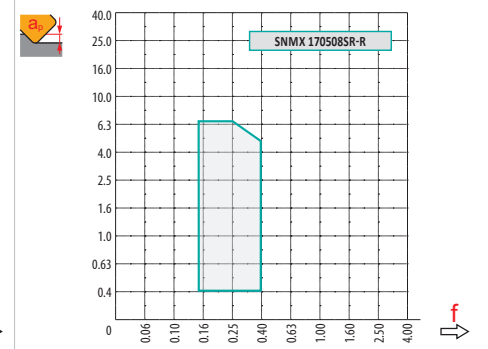
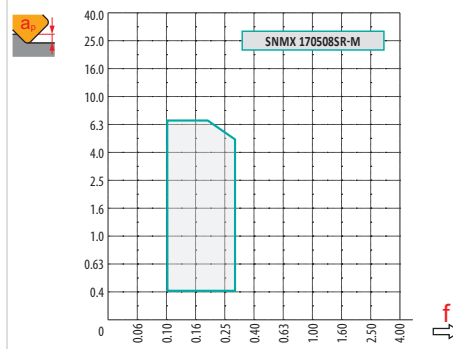
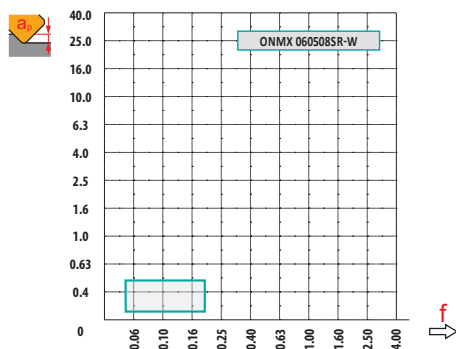
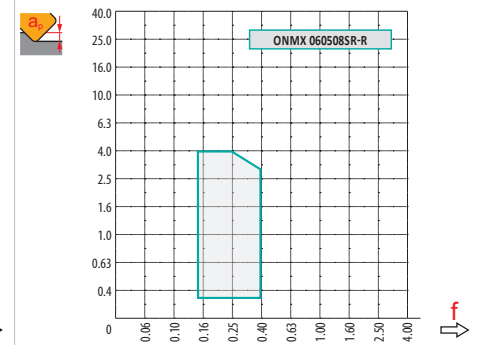


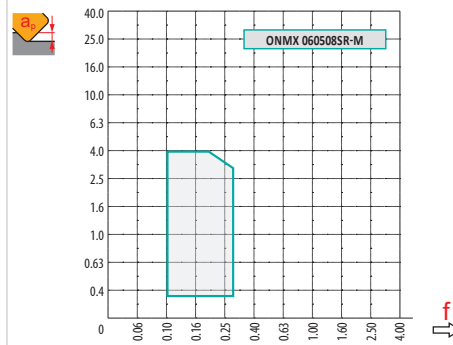


a_s / DC	5%	10%	15%	20%	25%	30%	40%	50%	60%	70%	75%	80%	90%	100%
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	ONMX 06-F	ONMX 06-M	ONMX 06-R	ONMX 06-W	SNMX 17-M	SNMX 17-R
	0.80	0.80	0.80	0.80	0.80	0.80
	0.75	0.75	0.75	4.30	0.70	0.70

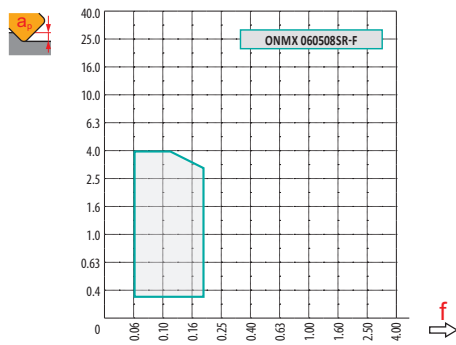


		0.50	1.00	1.50	2.00	2.50	3.00	3.50	4.00
50		51.06	52.11	53.19	54.27	55.35	56.43	57.51	58.59
63		64.06	65.11	66.19	67.27	68.35	69.43	70.51	71.59
80		81.06	82.11	83.19	84.27	85.35	86.43	87.51	88.59
100		101.06	102.11	103.19	104.27	105.35	106.43	107.51	108.59
125		126.06	127.11	128.19	129.27	130.35	131.43	132.51	133.59
160		161.06	162.11	163.19	164.27	165.35	166.43	167.51	168.59
200		201.06	202.11	203.19	204.27	205.35	206.43	207.51	208.59
250		251.06	252.11	253.19	254.27	255.35	256.43	257.51	258.59

DC		S							
		0.00	1.00	2.00	3.00	4.00	5.00	6.00	7.00
50	DEF	47.24	49.40	51.56	53.73	55.90	58.06	60.23	62.40
63		60.24	62.40	64.56	66.73	68.90	71.06	73.23	75.40
80		77.24	79.40	81.56	83.73	85.90	88.06	90.23	92.40
100		97.24	99.40	101.56	103.73	105.90	108.06	110.23	112.40
125		122.24	124.40	126.56	128.73	130.90	133.06	135.23	137.40
160		157.24	159.40	161.56	163.73	165.90	168.06	170.23	172.40
200		197.24	199.40	201.56	203.73	205.90	208.06	210.23	212.40
250		247.24	249.40	251.56	253.73	255.90	258.06	260.23	262.40




DC	X.V	f _{max}
50	1.35	0.36
63	1.39	0.40
80	1.44	0.45
100	1.48	0.51
125	1.53	0.57
160	1.58	0.64
200	1.63	0.72
250	1.68	0.80




DC	O	
	RPMX	APMX/I
50	0.3	0.4/100
63	0.2	0.25/100
80	0.2	0.2/100
100	0.1	0.1/100
125	0.1	0.05/100



DC	S	
	RPMX	APMX/I
47.24	0.1	0.1/100
60.24	0.1	0.05/100
77.24	0.1	0.05/100




DC	O			
	DMIN	DMAX	S MAX DMIN	S MAX DMAX
50	98	110	0.55	0.95
63	123	136	0.55	0.85
80	157	170	0.65	0.85
100	197	210	0.65	0.8
125	247	260	0.65	0.8
160	317	330	0.6	0.7
200	397	410	0.7	0.8
250	497	510	0.6	0.7




O	a _{max}
	11.5



-> 4.0	16
-> 5.1	14
-> 10.7	8
-> 11.5	6



-> 7.0	8
-> 11.4	4



ONMX 06-W	
-> 0.5	8