




a_e / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	SDET 13-F	SDMT 13-M	SDMT 13-R	SDET 13-FA	XDET 13
	-	-	-	-	-
	1.75	1.75	1.75	1.75	8.19

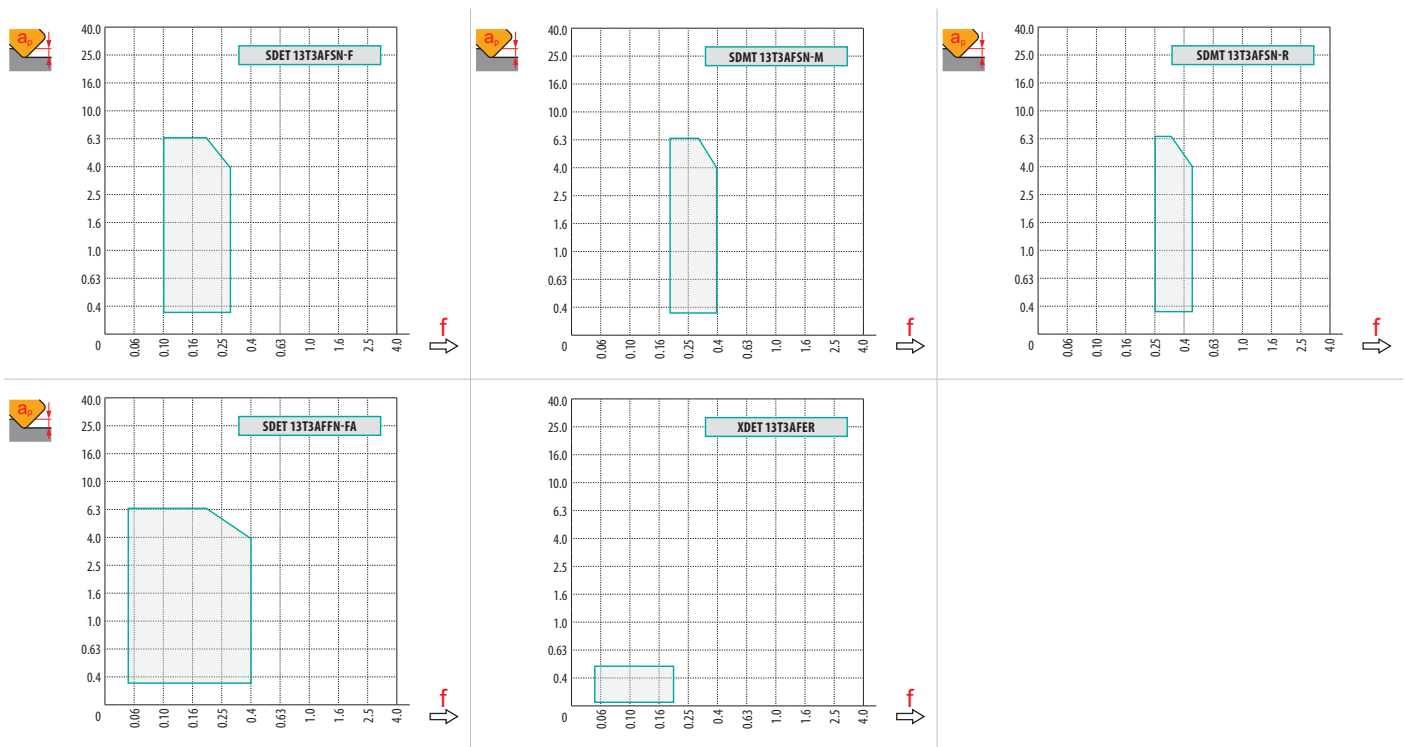

		f_{max}		RPMX	APMX/I		DMIN	DMAX			a_p
32	1.22	0.15	32	14.1°	6.4/27	32	60.0	89.8	1.7	1.7	1.5
40	1.26	0.16	40	11.8°	6.4/32	40	75.0	107.0	1.7	1.7	
50	1.30	0.18	50	9.8°	6.4/39	50	94.0	127.0	1.7	1.7	
63	1.34	0.20	63	7.7°	6.4/49	63	120.0	152.8	1.7	1.7	
80	1.39	0.22	80	5.2°	6.4/72	80	155.0	186.8	1.7	1.7	
100	1.43	0.24	100	4.1°	6.4/91	100	193.0	225.8	1.7	1.7	
125	1.48	0.26	125	3.2°	5.45/100	125	245.0	275.6	1.7	1.7	
160	1.53	0.29	160	1.0°	1.6/100	160	322.0	345.6	1.7	1.7	
200	1.58	0.33	200	0.4°	0.55/100	200	405.0	425.6	1.7	1.7	
250	1.63	0.36	250	0.3°	0.4/100	250	505.0	525.6	1.7	1.7	