

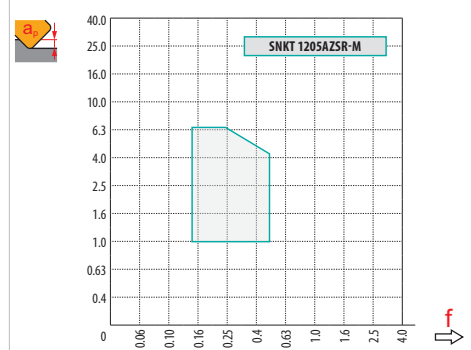


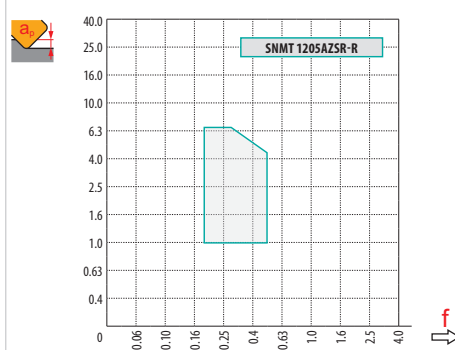

a_e / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

RE	SNMT 12-M	SNMT 12-R	SNKT 12-M
BS	0.95	1.03	1.59

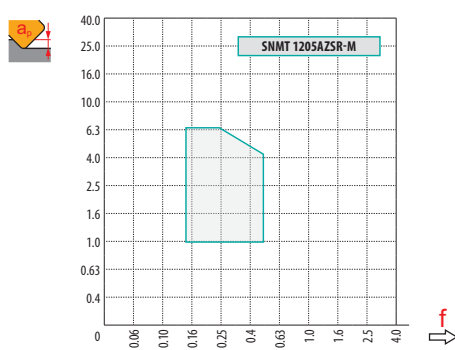

DC	X.V	f_{max}
50	1.30	0.47
63	1.34	0.53
80	1.39	0.60
100	1.43	0.67
125	1.47	0.74
160	1.53	0.84
200	1.57	0.94
250	1.62	1.05