




a_e DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	OEHT 09-MM	OEHT 09-M	XEHT 09	REHT 24-MM	REHT 24-M
	—	—	—	12.00	12.00
	2.00	2.00	14.80	—	—

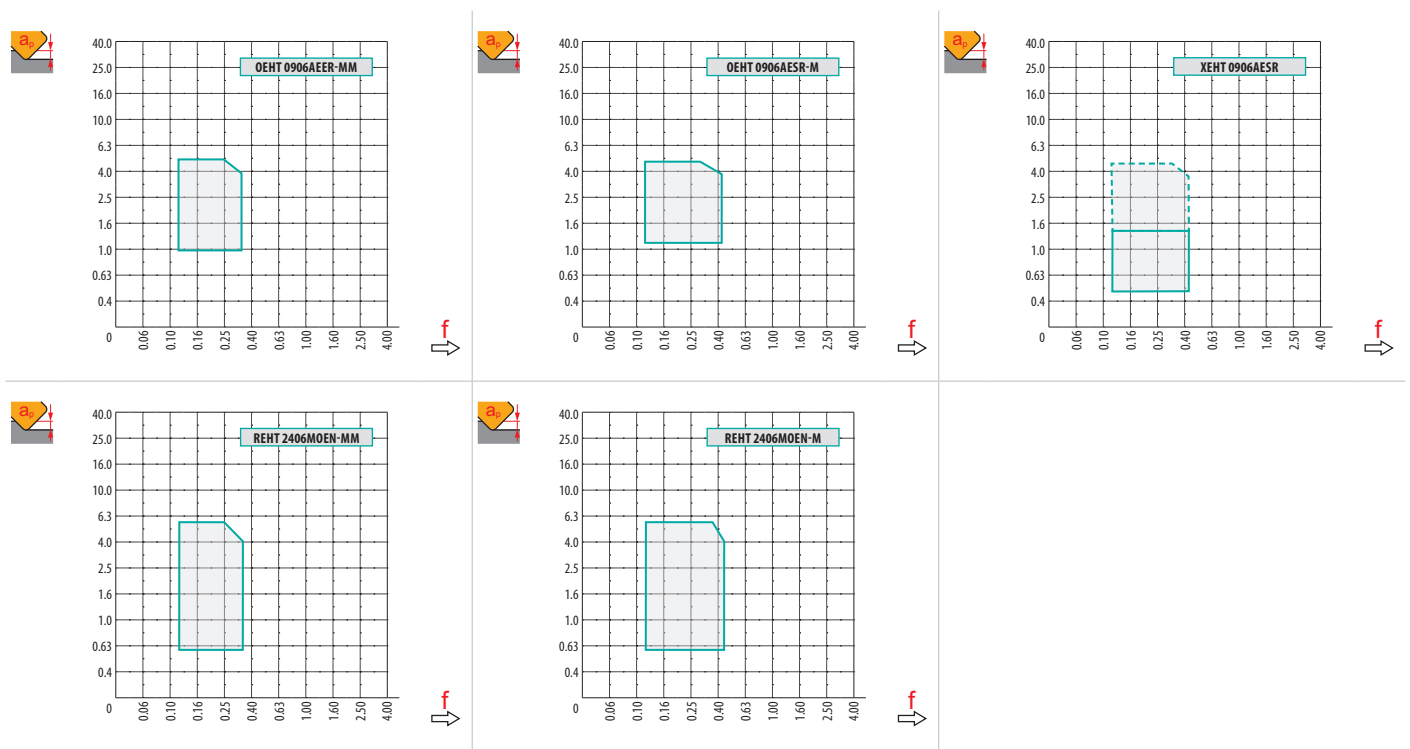

		0.00	0.50	0.75	1.25	1.50	2.00	2.50	3.00	4.00	5.00	6.00
80		70.90	77.76	79.25	81.57	82.52	84.17	85.56	86.77	88.79	90.39	91.68
100		90.90	97.76	99.25	101.57	102.52	104.17	105.56	106.77	108.79	110.39	111.68
125		115.90	122.76	124.25	126.57	127.52	129.17	130.56	131.77	133.79	135.39	136.68
160		150.90	157.76	159.25	161.57	162.52	164.17	165.56	166.77	168.79	170.39	171.68
200		190.90	197.76	199.25	201.57	202.52	204.17	205.56	206.77	208.79	210.39	211.68
250		240.60	247.46	248.95	251.27	252.22	253.87	255.26	256.47	258.49	260.09	261.38
315		305.60	312.46	313.95	316.27	317.22	318.87	320.26	321.47	323.49	325.09	326.38



		
80	1.44	0.51
100	1.48	0.57
125	1.53	0.64
160	1.58	0.72
200	1.63	0.80
250	1.68	0.90
315	1.74	1.01



		
		
80	4.9°	8.4/100
100	3.7°	6.3/100
125	2.8°	4.7/100
160	2.1°	3.5/100
200	1.6°	2.6/100



		
94.9	5.0°	8.6/100
114.9	3.7°	6.3/100
139.9	2.8°	4.7/100
174.9	2.1°	3.5/100
214.9	1.6°	2.6/100



				
	DMIN	DMAX		
80	146.0	190.0	8.8	8.8
100	186.0	230.0	8.8	8.8
125	236.0	280.0	8.8	8.8
160	306.0	350.0	8.8	8.8
200	386.0	430.0	8.8	8.8


				
	DMIN	DMAX		
94.9	146.0	189.0	11.5	11.5
114.9	186.0	229.0	11.5	11.5
139.9	236.0	279.0	11.5	11.5
174.9	306.0	349.0	11.5	11.5
214.9	386.0	429.0	11.5	11.5



		
	5.5	5.4



												
		3	5	10	15	20	30	40	50	60	80	100
94.9		1.067	1.378	1.948	2.386	2.755	3.375	3.897	4.357	4.772	5.511	6.161
		3	5	10	15	20	30	40	50	60	80	100
12.0		0.537	0.693	0.980	1.200	1.386	1.697	1.960	2.191	2.400	2.771	3.098



-> 5.0	8
-> 6.4	7
-> 14.1	4
-> 16.1	2

