




$a_e$ / DC	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
X.V	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
x.f	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
x.f	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	<b>VCGT 22-FA</b>
	3.0
	-

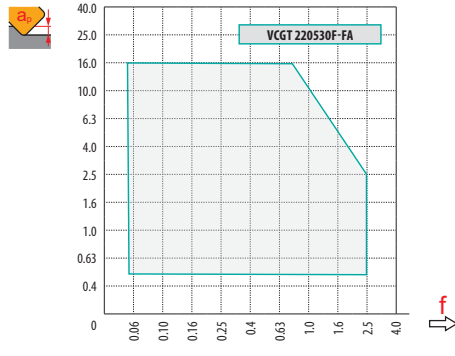

	<b>0.5</b>	<b>3.0</b>	<b>12.0</b>
	0.86	0.31	0.05

	<b>RPMX</b>	<b>APMX/I</b>
<b>32</b>	8.0	12.0/87
<b>40</b>	8.0	12.0/87
<b>50</b>	6.0	10.4/100
<b>63</b>	4.2	7.2/100
<b>80</b>	3.1	5.3/100

	<b>DMIN</b>	<b>DMAX</b>		
<b>32</b>	42.0	64.0	4.2	12.0
<b>40</b>	58.0	80.0	7.7	12.0
<b>50</b>	78.0	100.0	9.0	12.0
<b>63</b>	104.0	126.0	9.3	12.0
<b>80</b>	138.0	160.0	9.7	12.0

	9
--	---

	$\mu\text{m}$	<b>3</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>30</b>	<b>40</b>	<b>50</b>	<b>60</b>	<b>80</b>	<b>100</b>
<b>32</b>		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578
<b>40</b>		0.693	0.894	1.265	1.549	1.789	2.191	2.530	2.828	3.098	3.578	4.000
<b>50</b>		0.775	1.000	1.414	1.732	2.000	2.449	2.828	3.162	3.464	4.000	4.472
<b>63</b>		0.869	1.122	1.587	1.944	2.245	2.750	3.175	3.550	3.888	4.490	5.020
<b>80</b>		0.980	1.265	1.789	2.191	2.530	3.098	3.578	4.000	4.382	5.060	5.657
	$\mu\text{m}$	<b>3</b>	<b>5</b>	<b>10</b>	<b>15</b>	<b>20</b>	<b>30</b>	<b>40</b>	<b>50</b>	<b>60</b>	<b>80</b>	<b>100</b>
<b>3.0</b>		0.268	0.346	0.490	0.600	0.693	0.849	0.980	1.095	1.200	1.386	1.549